



Typical Applications:

See selection guide on page 3 for recommended typical applications for TeeJet tips.


Features:

- Ideal for banding over the row or in row middles.
- Provides uniform distribution throughout the flat spray pattern.
- Easily mounted on spray boom or planter.
- Available with VisiFlo® color-coding in stainless steel or all stainless steel, hardened stainless steel and brass.



Icon	PSI	CAPACITY ONE NOZZLE IN GPM	GPA 30° Field Acres												
			3 MPH	3.5 MPH	4 MPH	4.5 MPH	5 MPH	5.5 MPH	6 MPH	6.5 MPH	7 MPH	7.5 MPH	8 MPH	8.5 MPH	
TP4001E† TP6501E†	20	0.071	4.7	4.0	3.5	3.1	2.8	2.6	2.3	2.2	2.0	1.9	1.8	1.7	
	30	0.087	5.7	4.9	4.3	3.8	3.4	3.1	2.9	2.7	2.5	2.3	2.2	2.0	
	40	0.10	6.6	5.7	5.0	4.4	4.0	3.6	3.3	3.0	2.8	2.6	2.5	2.3	
TP8001E TP9501E (100)	50	0.11	7.3	6.2	5.4	4.8	4.4	4.0	3.6	3.4	3.1	2.9	2.7	2.6	
	60	0.12	7.9	6.8	5.9	5.3	4.8	4.3	4.0	3.7	3.4	3.2	3.0	2.8	
TP40015E† TP65015E†	20	0.11	7.3	6.2	5.4	4.8	4.4	4.0	3.6	3.4	3.1	2.9	2.7	2.6	
	30	0.13	8.6	7.4	6.4	5.7	5.1	4.7	4.3	4.0	3.7	3.4	3.2	3.0	
	40	0.15	9.9	8.5	7.4	6.6	5.9	5.4	5.0	4.6	4.2	4.0	3.7	3.5	
TP80015E TP95015E (100)	50	0.17	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0	
	60	0.18	11.9	10.2	8.9	7.9	7.1	6.5	5.9	5.5	5.1	4.8	4.5	4.2	
TP4002E† TP6502E†	20	0.14	9.2	7.9	6.9	6.2	5.5	5.0	4.6	4.3	4.0	3.7	3.5	3.3	
	30	0.17	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0	
	40	0.20	13.2	11.3	9.9	8.8	7.9	7.2	6.6	6.1	5.7	5.3	5.0	4.7	
TP8002E TP9502E (50)	50	0.22	14.5	12.4	10.9	9.7	8.7	7.9	7.3	6.7	6.2	5.8	5.4	5.1	
	60	0.24	15.8	13.6	11.9	10.6	9.5	8.6	7.9	7.3	6.8	6.3	5.9	5.6	
TP4003E† TP6503E†	20	0.21	13.9	11.9	10.4	9.2	8.3	7.6	6.9	6.4	5.9	5.5	5.2	4.9	
	30	0.26	17.2	14.7	12.9	11.4	10.3	9.4	8.6	7.9	7.4	6.9	6.4	6.1	
	40	0.30	19.8	17.0	14.9	13.2	11.9	10.8	9.9	9.1	8.5	7.9	7.4	7.0	
TP8003E TP9503E (50)	50	0.34	22	19.2	16.8	15.0	13.5	12.2	11.2	10.4	9.6	9.0	8.4	7.9	
	60	0.37	24	21	18.3	16.3	14.7	13.3	12.2	11.3	10.5	9.8	9.2	8.6	
TP4004E† TP6504E†	20	0.28	18.5	15.8	13.9	12.3	11.1	10.1	9.2	8.5	7.9	7.4	6.9	6.5	
	30	0.35	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2	
	40	0.40	26	23	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.6	9.9	9.3	
TP8004E TP9504E (50)	50	0.45	30	25	22	19.8	17.8	16.2	14.9	13.7	12.7	11.9	11.1	10.5	
	60	0.49	32	28	24	22	19.4	17.6	16.2	14.9	13.9	12.9	12.1	11.4	
TP4005E† TP6505E†	20	0.35	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2	
	30	0.43	28	24	21	18.9	17.0	15.5	14.2	13.1	12.2	11.4	10.6	10.0	
	40	0.50	33	28	25	22	19.8	18.0	16.5	15.2	14.1	13.2	12.4	11.6	
TP8005E TP9505E (50)	50	0.56	37	32	28	25	22	20	18.5	17.1	15.8	14.8	13.9	13.0	
	60	0.61	40	35	30	27	24	22	20	18.6	17.3	16.1	15.1	14.2	
TP4006E† TP6506E†	20	0.42	28	24	21	18.5	16.6	15.1	13.9	12.8	11.9	11.1	10.4	9.8	
	30	0.52	34	29	26	23	21	18.7	17.2	15.8	14.7	13.7	12.9	12.1	
	40	0.60	40	34	30	26	24	22	19.8	18.3	17.0	15.8	14.9	14.0	
TP8006E TP9506E (50)	50	0.67	44	38	33	29	27	24	22	20	19.0	17.7	16.6	15.6	
	60	0.73	48	41	36	32	29	26	24	22	21	19.3	18.1	17.0	
TP6508E† TP11008E†	20	0.57	38	32	28	25	23	21	18.8	17.4	16.1	15.0	14.1	13.3	
	30	0.69	46	39	34	30	27	25	23	21	19.5	18.2	17.1	16.1	
	40	0.80	53	45	40	35	32	29	26	24	23	21	19.8	18.6	
TP8008E TP9508E (50)	50	0.89	59	50	44	39	35	32	29	27	25	23	22	21	
	60	0.98	65	55	49	43	39	35	32	30	28	26	24	23	
TP4010E† TP6510E† TP8010E† TP11010E† (24)	20	0.71	47	40	35	31	28	26	23	22	20	18.7	17.6	16.5	
	30	0.87	57	49	43	38	34	31	29	27	25	23	22	20	
	40	1.00	66	57	50	44	40	36	33	30	28	26	25	23	
TP515E† TP8015E† TP11015E†	50	1.12	74	63	55	49	44	40	37	34	32	30	28	26	
	60	1.22	81	69	60	54	48	44	40	37	35	32	30	28	
TP6515E† TP8015E† TP11015E†	20	1.06	70	60	52	47	42	38	35	32	30	28	26	25	
	30	1.30	86	74	64	57	51	47	43	40	37	34	32	30	
	40	1.50	99	85	74	66	59	54	50	46	42	40	37	35	
TP8002E-EV TP8002E-EV (100)	50	1.68	111	95	83	74	67	60	55	51	48	44	42	39	
	60	1.84	121	104	91	81	73	66	61	56	52	49	46	43	

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C). See pages 136–157 for useful formulas and other information. † Available in brass and/or stainless steel and/or hardened stainless steel.

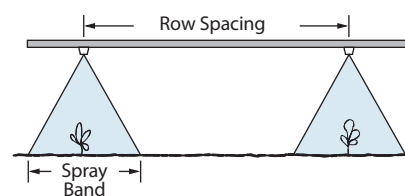

Tip Spacing	Tip Angle					GPA Conversion Factors*	
	40°	65°	80°	95°	110°	20"	30"
8"	11"	6"	5"	4"	3"	2.50	3.75
10"	14"	8"	6"	5"	4"	2.00	3.00
12"	16"	9"	7"	5"	4"	1.67	2.50
15"	21"	12"	9"	7"	5"	1.33	2.00

*To find GPA rate on band widths, multiply the tabulated GPA for ROW SPACING by conversion factors.

How to order:

Specify tip number.

Examples:

- TP8002EVS – Stainless Steel with VisiFlo color-coding
- TP8002E-HSS – Hardened Stainless Steel
- TP8002E-SS – Stainless Steel
- TP8002E – Brass